



CP.ZED24



APPLICATION

1 or 2 actuators series ZED24.RI

CONTROL UNIT POWER SUPPLY


230 Vac - 50/60 Hz

MOTORS POWER SUPPLY

24 Vdc / 5.5 A + 5.5 A

MAIN FUNCTIONS

Parameter and operation logic regulations through trimmers and dip-switches | Integrated 433.92 MHz 64-code radio receiver with ARC coding | Removable terminal boards | Automatic and semi-automatic logic | Motor limit switch inputs | Inputs for open, close, stop, step by step and photocell | Input for N.C or 8K2 sensitive edge | Output for service light 24 VAC/DC | Output for open gate indicator | Output for connecting flashing light | Electronic torque adjustment | Anti-crushing safety thanks to amperometric detection | Fixed slow-downs | Advantouch system to manage radio transmitters memorised on integrated receiver

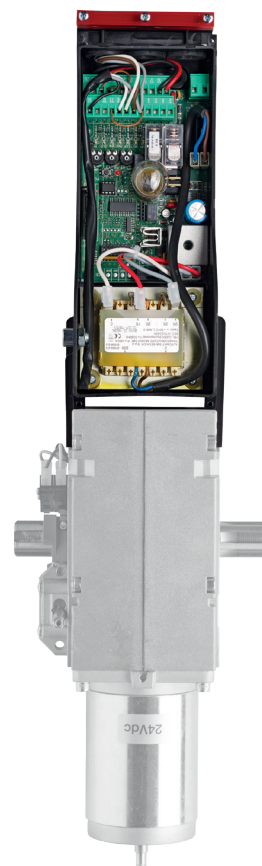

CBY.24V

Battery charger card. The CBY.24V card allows charging two different types of nickel metalhydride and lead batteries.



DA.BT2

2.1 Ah 12 Vdc Battery.

DA.BT6

7 Ah 12 Vdc Battery.



XLB.CB

Battery box fitted with universal bracket and cables. IP54.

AUTOMATISMI BENINCÀ SpA • Via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • sales@beninca.com

